

1. ORIGINAL AND/OR SUBSEQUENT RECORD USED TO EVALUATE THE CORNER POSITION.
2. DESCRIPTION OF EVIDENCE FOUND, NOTE DISCREPANCIES IN THE RECORD, STATE METHOD OF ESTABLISHING LOCATION OF BLITZ CORNERS.
3. DESCRIPTION OF MONUMENT AND ACCESSORIES SET TO PERPETUATE THE CORNER POSITION.
4. SKETCH OF CORNER, SHOW ALL PERTINENT DATA WHICH CAN BEST BE SHOWN IN A SKETCH. EXAMPLE, CORNER MARKINGS, TOPOGRAPHY TIES, POSITION OF ACCESSORIES, ETC.
5. CERTIFICATION MUST BE SIGNED AND SEALED BY LAND SURVEYOR REGISTERED IN THE STATE OF MONTANA.
6. FILL IN CROSS INDEX AND SECTION DIAGRAM AT BOTTOM OF SHEET.

65488

CERTIFIED CORNER RECORDATION

CORNER South Quarter SEC. 1, T. 1 N., R. 58 E., P.M.M., Carter COUNTY, MT

ORIGINAL RECORD : Surveyed by George Scheetz in 1889.

Set a sandstone 16x10x6 ins., 11 ins. in the ground for 1/4 Sec. Cor. marked 1/4 on N. face. From which a pine tree 6 ins. in diam., bears N 10° E, dist. 16 lks., marked 1/4 S BT. A pine tree 8 ins. in diam., bears S 19° W, dist. 43 lks., marked 1/4 S BT.

SUBSEQUENT RECORD: Dependent resurvey by William R. Bandy and Ernest Parker in 1933.

Proportional point for the 1/4 sec. cor.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with brass cap marked

S 1
1/4 -----
S 12
1933

from which


A pine, 11 ins. diam., bears N 3°45' E, 106 lks. dist., mkd. 1/4 S 1 BT.
A pine, 18 ins. diam., bears S 49°15' E, 29 lks. dist., mkd. 1/4 S 12 BT.

EVIDENCE FOUND: Found brass cap on a 1" iron pipe marked as per 1933 record in a mound of stone.

A pine, 19 ins. diam., bears S 43° E, 18.5 ft. dist., marked 1/4 S 12 with a BT sign marked N43°W, 18.5', T1N R58E S12 1/4 C.G. 7/84

A pine, 12 ins. diam., bears N 12° E, 69.7 ft. dist., marked 1/4 S 1 with a BT sign marked S12°W, 69.7', T1N R58E S1 1/4 C.G. 7/84

SET: Set a fiberglass post along northside of monument.

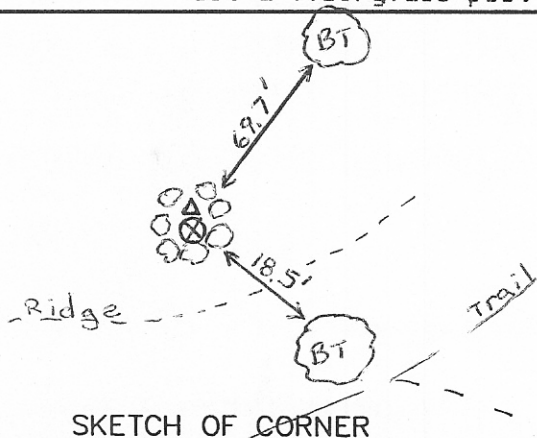

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown to be true and correct.

Signature of Ground Party Chief
Jimmie L. Brewer

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-01, et seq., M.C.A.)


Signature of Surveyor & Seal
Jimmie L. Brewer

Date 11-6-85 Reg. No. 7155LS

Employer: HKM Associates

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record on _____ was noted on the cross-index plat and is assigned page No. _____, in book No. _____

County Official



Cross Index No. E-23 T. 1 N. R. 58 E PMM