

19	20
30	29

CERTIFIED CORNER RECORDATION
 Corner _____ T. 4 S. R. 51 E. P.M.M. Powder River County

1908 Original GLO Record by George L. Elmer and Theodoor O. Johnston, Book 5664 Page 32
 "Set a sand stone, 15x10x4 ins., 10 ins. in the ground, for the cor. of secs. 19, 20, 29 and 30, marked with 2 notches o[n] S. and 5 notches on E. edge; and raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor."

1947 GLO Resurvey by Andrew Nelson and Ranney Y. Lyman, Book 8460 Page 31
 "The cor. of secs. 19, 20, 29, and 30, marked by a sand stone, 16 x 14 x 6 ins., properly marked and firmly set with scattered mound of stone.

At the point for the corner

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with brass cap marked

T 4S	R51E
S 19	S 20
S 30	S 29
1947	

Bury the old corner stone, alongside the iron post, and raise the mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor."

1992 Rehabilitation by S. R. Smith

Found 2 1/2 ins. GLO brass cap, marked as shown below, on 2 ins. iron pipe, 6 ins. above ground, at fence corner.

Established one new bearing tree:

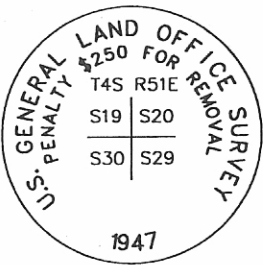

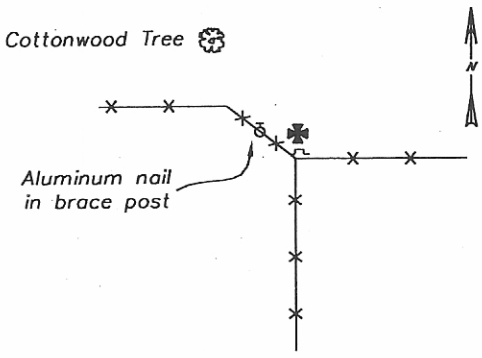
A cottonwood, 8 1/2 ins. diam., bears N.43°W., 62.67 ft. dist., scribed "X", "BT".

Set an aluminum nail in brace post, north side, 1 ft. above ground, bears N.81°W., 7.68 ft. dist.

Set a galvanized steel witness post on fence corner, 6 ft. long, with M.D.T. decal attached, bears South, 1.15 ft. dist.

Measurements were made with a Silva hand compass (declination 13°E.) and a steel tape.

Refer to the Certificate of Survey filed in conjunction with this corner recordation for ties to adjacent section controlling corners in this area.

<div style="display: flex; align-items: center;">  <div style="text-align: center;"> <p>Cottonwood Tree </p>  <p>Aluminum nail in brace post</p> </div> </div>	<p style="text-align: center; font-weight: bold; font-size: small;">CERTIFICATION</p> <p>I, <u>S. R. Smith</u> <small>certify the information shown herein is true and correct.</small></p> <p style="text-align: center;"><i>S R Smith</i> <small>Signature Ground Party Chief</small></p> <p>I, <u>S. R. Smith</u> <small>certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)</small></p> <p style="text-align: center;"><i>S R Smith</i> <small>Signature of Surveyor & Seal</small></p> <p>Reissue Date: <u>8/3/98</u> Reg. No. <u>4740S</u> Employer: <u>Smith Surveying</u></p>
SKETCH OF CORNER	

Office of Clerk and Recorder, County of Powder River. This "corner record" was filed for record on February 18, 1999 @ 1:04pm was noted on the cross-index plat and is assigned page No. 152879, in book No.

Indexed	<input checked="" type="checkbox"/>
Compared	<input type="checkbox"/>

(Carol) B. Richards, Deputy
 County Official

Cross Index No. R-5 T. 4 S. R. 51 E. PMM

