

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set in perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 COR 1/6 T. 5N R. 9W P.M.M., Deer Lodge County


1868 GLO Record: '...Set a post in mound of rock with pits marked stone as per instructions....'

1968 BLM: 'Point for the 1/4 sec. corner of secs. 1, & 6, at proportionate distance; there is no remaining evidence of the original corner...set an 30" x 2-1/2" iron post 26" in the ground with brass cap ...from which:

15" fir brs. S.35-1/2°E., 27 lks...

6" fir brs. N.85°W., 51 lks...

November, 1993, Found: Found a 3-1/4" brass cap on 2-1/2" pipe, cap marked as shown below. Also found BT's alive with partially closed blazes.

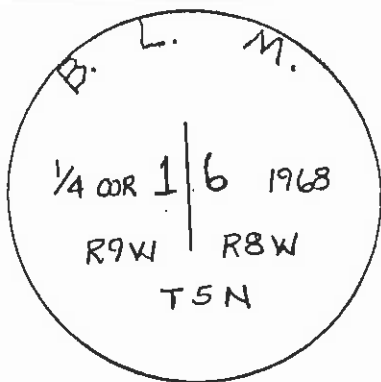

CERTIFICATION

I, Duane G. Schmitz
certify the information shown herein is true and correct.

Duane G. Schmitz
Signature Ground Party Chief


I, Richard A. Ainsworth
certify that this Corner Recordation was lawfully performed by me or under my direction in compliance with the "Corner Recordation Act" (70-27-101, 214, etc., M.C.A.)

Richard A. Ainsworth
Signature of Surveyor

Date: 12/93 Reg. No. 29293 S

Employer: Professional Consultants, Inc

Office of Clerk and Recorder, County of Deer Lodge. This "corner record" was filed for record on December 16, 1994 was noted on the cross-index plat and is assigned page No. 357, in book No. 2 Mellie Anderson - Deputy County Official



• - corner this sheet