

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner South 1/4 Cor. Sec. 32 T. 8 N, R. 9 W P.M.M. Powell County

Subsequent Record - BLM 1997

Dependent Resurvey, dated October 2, 1997:

Found original granite stone, 19 x 17 x 10 ins., set 14 ins. in the ground, mkd. with a 'X' on the top and witnessed by a mound of stone, 2 ft. diam., N of the cor.

Set a standard monument, 22 ins. in the ground, bury the original stone alongside and raised a collar of stone, 2 ft. diam., around the monument, with brass cap mkd.; T 8 N, R 9 W 1/4 S32 S5 T 7 N 1997.

Subsequent Record - Druyvestein, Johnson & Anderson 1998

Corner Recordation, Office of the Clerk and Recorder of Powell County, January 2nd, 1998.
The record monument per BLM.

Found - MDT 1998

Found: The record monument per BLM.

Set - MDT 1998


Set: 5/8" rebars with red plastic caps. See back.

Set - MDT 1999

Set: Original BLM monument from Reference Marks and stamped as shown below, 6 in. below the ground surface. Placed 5/8 in. rebar inside monument.

Set: A Montana Department of Transportation 2 in. aluminum cap (for a reference monument) on a 5/8 in. rebar 30 ins. in the ground, South a dist. of 84.62 Ft., 2.0 ft. North of the South R/W fence, mkd; MDOT RM 1 1/4 1999. Set witness post w/ plastic MARLS tag 2' S.

Set: A Montana Department of Transportation 2 in. aluminum cap (for a reference monument) on a 5/8 in. rebar 30 ins. in the ground, North a dist. of 33.59 Ft., 1.0 ft. South of the North R/W fence, mkd; MDOT RM 2 1/4 1999. Nailed plastic MARLS tag to fence post 1' N.

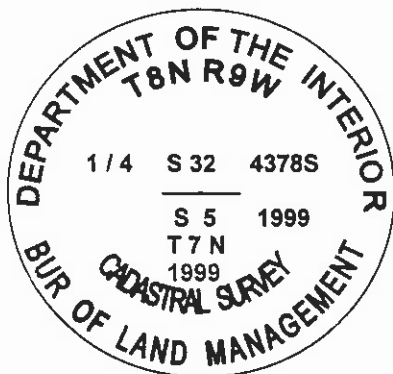

147215

SKETCH OF CORNER

CERTIFICATION

I, Henry D. Kapp
Certify the information shown herein is true and correct.

Henry Kapp
Signature of Ground Party Chief

I, David R. Davis
Certify that this Corner Record correctly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101 et seq., MCA)

David R. Davis
Signature of Surveyor & Seal

Date: 6/99 Reg. No. 4378 S

Employer: MDT

Office of Clerk and Recorder, County of Powell. This "corner record" was filed for record on June 25th, 1999 @ 10:50 A.M. was noted on the cross-index plat, and is assigned Page No. _____ in Book No. _____

N/C

Karla M. [Signature]
County Official

Sec. 32

• - Corner this sheet

Cross Index No. Z-07 T. 8N R. 9W PMM