

CERTIFIED CORNER RECORDATION

Corner 30, 29 / 31, 32 T. 15 N. R. 17 E. P.M.M. FERGUS County

Original Record: Set a limestone 14x10x7 ins 9 ins in the ground for Corner to Sections 29, 30, 31 & 32 marked with 1 notch on S. and 5 notches on E. Dug pits 18 (David E. Folsom) (Walter W. deLacy) 1875 ins sq.12 ins deep in each section. 5 1/2ft distant.

Subsequent Record: R/W plans from FAP 235(15) -date unknown and very hard to read- showed iron pins 97.7 ft. east of Hwy C, 97.7 ft. & 83.8 ft. west of Hwy C, (105.2 ft east, 90.2 ft. west and 76.3 ft. west of section corner.) Also showed an iron pin 70 ft. right of the R/W line. Plus concrete R/W posts to the west and south. C.O.S. 405 (filed June 23rd, 1985) states "NE cor of sec.31, Found the Hwy position from R/W map. No Monument Found or Set."

Evidence Found: County Roads west & south apparently have destroyed iron pins and R/W monuments. We find only an iron pin east of corner. Plus 2 R/W monuments not shown on the plans. Using found corners from C/S 485 we position corner according to C/S 485. This fits position off centerline stripe. Plus the tie to the found iron pin is within reason. 105.2 ft. record versus 105.01 ft. measured.


NOTE: *Bearing and Dist. are based on State Plane Metric NAD 83-1992. To convert Dist. shown (grid) to ground divide by C.A.F. of 0.99919991

SEE BACK



* SEE CERTIFICATE OF SURVEY FILED IN CONJUNCTION WITH THIS PROJECT.

LAT 47°01'35.44465"N
LON 109°36'30.19547"W
WGS 84

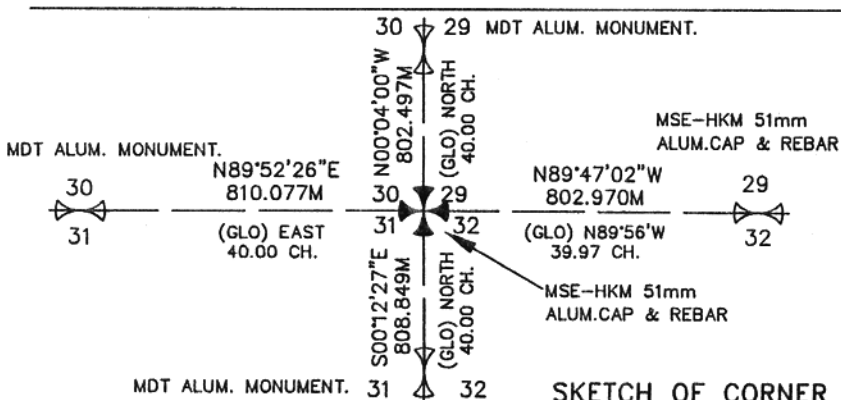

MONTANA

CERTIFICATION

I, SCOTT BLOOMERADER certify the information shown herein is true and correct.

* SCOTT BLOOMERADER *
Signature Ground Party Chief

I, Scott Bloomerader certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act (70-22-101, et seq., M.C.A.)

Scott Bloomerader
Signature of Surveyor & Seal

Date: 9/24/2001 Reg. No. 9005 LS

Employer: HKM Engineering Inc Billings, MT

Office of Clerk and Recorder, County of FERGUS. This "corner record" was filed for record on SEP 26 2001


was noted on the cross-index plat and is assigned page No. 51 in book No. 6

Scott A. [Signature] Susan M. [Signature]
County Official

Cross Index No. V-5 T. 15 N. R. 17 E. PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 29-T15N-R17E



• - corner this sheet

61833

Perpetuation: Set 51mm MSE-HKM Alum. cap with 61cm rebar flush with the asphalt. cap is grouted in place. Cap is stamped as shown.

