

INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 22 23 T. 17N R. 20W P.M.M. LAKE County

Original record:

40.00 set a sandstone, 18x 10x 3ins., 10 ins. in the ground for 1/4 sec. cor., marked 1/4 on W. face; and dig pits, 18 x 18 x 12ins. N. and S. of stone 3 ft. dist. and raise a mound of earth 3 1/2 base, 1 1/2ft. high, W. of corner.

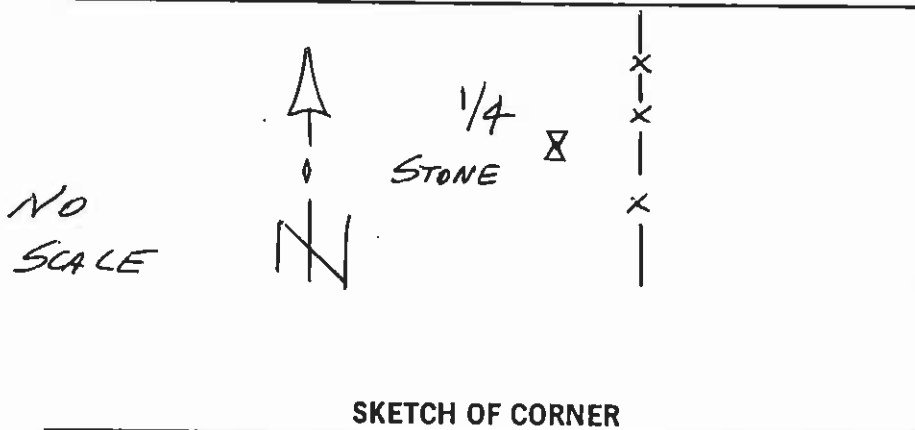

CERTIFICATION

I, _____ certify the information shown herein is true and correct.

Signature Christophar Balstad Jr

I, Christophar Balstad Jr certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)


Signature of Surveyor & Seal Christophar Balstad Jr

Date: 6/18/01 Reg. No. 58322 S

Employer: _____

Office of Clerk and Recorder, County of LAKE. This "corner record" was filed for record on JUN 19 2001 at 11:58 A.M. 416607 was noted on the cross-index plat and is assigned page No. _____, in book No. _____

RUTH E. HODGES
County Official



Cross Index No. P17 T. 17N R. 20W P.M.M.

Q-2399