

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSM 7153.53)


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

We find an iron pin driven 2 ins below road level which lines up with old fence line to the north and center of road to south and lines up with center of road to east and west. Also survey stakes with round metal tags attached and nailed to poles on 3 sides of the corner with distances marked on the stakes.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: June 1971

We leave the pin as found and make a sketch of the poles that are used as accessories. (See below)

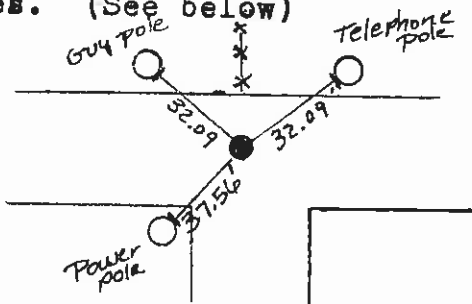

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See back of page.

Surveyor's Seal

I, _____
certify that the information shown herein is true and correct.

Signature of Ground Party Chief

I, H. Gene Warren
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

H. Gene Warren
Signature of Surveyor

DIAGRAM OF CORNER:

N. T19N
R20W | R19W
12 7
13 18

= Corner recorded on the sheet

2734 S
Registration Number

Office of Clerk and Recorder, County of Lake

This "corner record" was filed for record on the 1 day of July 1971, was noted on the cross-index plat and is assigned page No. 175 in book No. _____

ETHEL M. HARDING CLERK & RECORDER

Gross Index No. 16-25-19