

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S8 | S9 ^{1/4} T. 21N. R. 29W P.M.M. Sanders County


GLO RECORD (1889): Set a porphyry stone, 22x14x4 ins., 16 ins. in ground for 1/4 cor., marked 1/4 on west face. 2 BTs recorded.

RECORD - 1979 (Warren Corner Recordation Form): No evidence of original corner monument or BTs found. Set a 5/8" x 18" rebar with yellow plastic cap, marked Warren, 2734S, 16" in ground, piled mound of stone around. No RMs. Corner set by railroad station tie. Corner is located 36 ft. South and 55.00 ft. West of R.R. station 11945+15.5, which is point of tangency.

FOUND - 1989: (on the 100th anniversary of this corner) Found a 1/2" rebar with a melted yellow plastic cap, 36 feet South of centerline of RR tracks on South embankment of the RR. Monument in mound of stone. We accept this position based on Warren Corner Record and subsequent use of this corner position. At this position, we SET a 3 1/4" aluminum cap on a 2 1/2" x 30" alum. pipe, stamped as indicated below. Placed old rebar inside pipe and raised a mound of stone. Top of cap is 0.3' above top of mound of stone.

From which: A power pole with K tag bears S.03°E., 12.6 feet.
A metal post w/MDOH decal bears North, 2.5 feet.

See Certificate of Survey No. 995

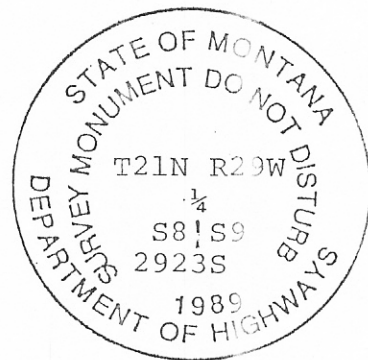


CERTIFICATION
 I, Duane Schmitz
 certify the information shown herein is true and correct.
Duane Schmitz
 Signature Ground Party
 I, Richard A. Ainsworth
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
Richard A. Ainsworth
 Signature of Surveyor & Seal
 Date: 11/89 Reg. No. 2023S
 Employer: PROFESSIONAL CONSULTANTS

SKETCH OF CORNER

Office of Clerk and Recorder, County of Sanders. This "corner record" was filed for record on the 12 day of Jan 1990, was noted on the cross-index plat and is assigned page No. 3, in book No. 336

Dimple Vaughn, Clerk
 County Official
Suey Claxton, Deputy

Cross Index No. G9 T. 21N R. 29W P.M.M.

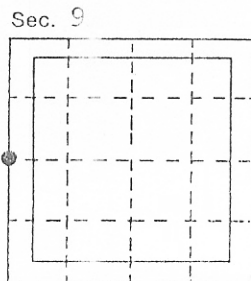

• - corner this sheet