

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Sec. Crnr. 8/9 17/16 T. 25 N R. 20 W P.M.M. Lake County

Record:

Set a post 4 ft long 4 ins. square 2 ins. in ground from which
 A tamarack 20 ins. diam. bears N 05° E 30 lks (19.8 ft) dist.
 A tamarack 18 ins. diam. bears S 50° E 28 lks (18.48 ft) dist.
 A tamarack 14 ins. diam. bears S 22° W 6 lks (3.96 ft) dist.
 A tamarack 14 ins. diam. bears N 45° W 7 lks (4.62 ft) dist.


Found:

No Evidence of post, Found a 1 1/2 ins. Brass Cap Marked 2343-S
 From which
 A stump 18 ins. diam. 3 ft tall bears N 05° E 18.7 ft. dist.
 A stump 20 ins. diam. 3 ins. tall bears S 50° E 18.5 ft. dist.
 A stump 13 ins. diam. 3.5 ft tall bears S 26° W 4.0 ft. dist.
 A stump 15 ins. diam. 3 ft tall bears N 50° W 4.5 ft. dist.

Accessories Created:

A Doug Fir 18 ins. diam. bears N 76° E 17.4 ft. dist.
 A Doug Fir 18 ins. diam. bears S 30° E 22.0 ft. dist.
 A Doug Fir 18 ins. diam. bears S 20° W 34.8 ft. dist.
 A Doug Fir 18 ins. diam. bears S 58° W 30.6 ft. dist.

All B.T.s marked with footblaze scribed "RM", and snowblaze both painted orange, as well as with MARLS B.T. tags

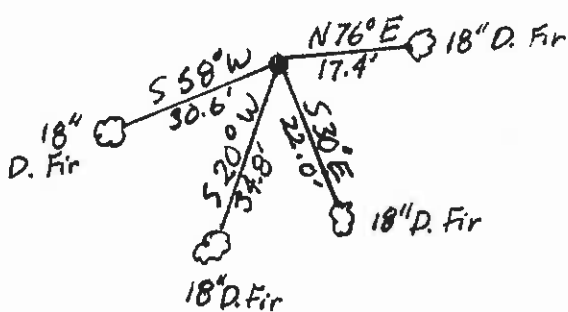

SKETCH OF CORNER

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.
 Signature, Ground Party Chief
RICHARD GOACHER
 I, _____
 certify that this Certified Record truly represents work performed
 by me or under my supervision in compliance with the "Corner
 Recordation Act" (70-2-101, et seq., M.C.A.)
 Signature of Surveyor & Seal
 Date: NOV 10 2003
 Employer: _____


Office of Clerk and Recorder, County of Lake. This "corner
 record" was filed for record on 442339 NOV 10 2003 4:34 pm

was noted on the cross-index plat and is assigned page No. _____, in

book No. 0-2523 RUTH E. HODGES By Judy M. Junis
 County Official

NC

Cross Index No. 59 T. 25 N R. 20 W P.M.M.



• - corner this sheet