


INSTRUCTIONS

1. Original and/or a recent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill In Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner N.E. Section 29 T. 35N R. 55E P.M.M. Sheridan County

1. Had a copy of G.L.O. Plat.
2. Found #5 rebar at this corner.  
Monument fits existing features.  
Accepted location of monument.
3. Left found monument in place.  
Monument on line with fences going east and south.  
Monument is on shoulder of existing road.

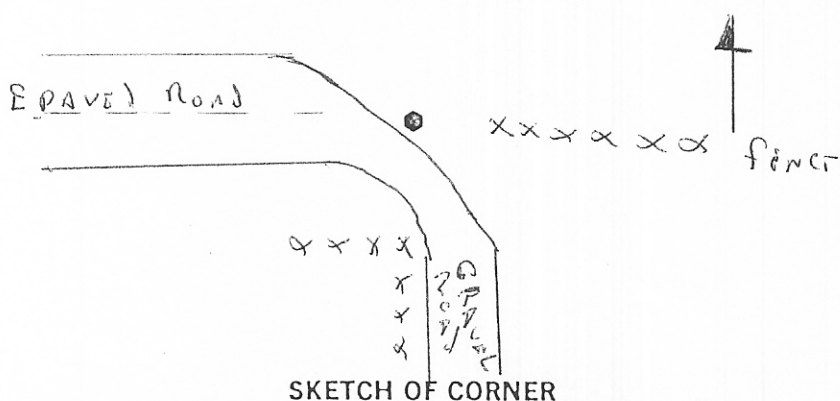

CERTIFICATION

I, \_\_\_\_\_ certify the information shown hereon is true and correct.

Signature of Party Chief  
**RICHARD H. THOM**

I, **Richard H. Thom** certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (7-22-101 et seq.)

Signature of Surveyor  
**Richard H. Thom**

Date: 1/95 Reg. No. 9018S

Employer: **Interstate Engineering, Inc.**

Office of Clerk and Recorder, County of Sheridan. This "corner record" was filed for record on January 30, 1995 at 11:00 AM was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. 215

441434

Milton E. Howland County Official  
by Bernice VanCuran Deputy

Cross Index No. R-9 T. 35N R. 55E P.M.M.

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 29


• - corner this sheet