INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

1/4 Corner Section 16 T. 5 N. R. 13 W. P.M.M. Deer Lodge County

ORIGINAL RECORD: (G.L.O.) Not recovered.

SUBSEQUENT RECORD: (1967 B.L.M.)

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. [as shown below] from which:

The old bearing tree, a pine stump, 11 ins. diam., bears N. 47° E., 113 lks. dist., mkd. 1/4 S16 BT.

The new bearing trees:

A pine, 14 ins. diam., bears N. 25¾° E., 7 lks. dist., mkd. 1/4 S16 BT.

A pine, 8 ins. diam., bears N. 55½° E., 127 lks. dist., mkd. 1/4 S16 BT.

Bury the mkd. stone alongside the iron post.

EVIDENCE FOUND: Found 3¼" Brass Cap, 0.5' above ground in mound of stone, from which:

A pine, 15 ins. diam., dead, scribing visible, bears N25°E, 11 lks. dist.

A pine, 10 ins. diam., dead, scribing visible, bears N59.5°E, 127 lks. dist.

PERPETUATION: Left monument as found.

Located in a clearing on east-west oriented ridge.

Date of Survey: October, 2009.

NAD 83 coordinates for this corner:
Latitude = 46°11'10.87673"N Longitude = 113°14'36.79025"W
NOTE: These coordinates are to be used as a search tool only.

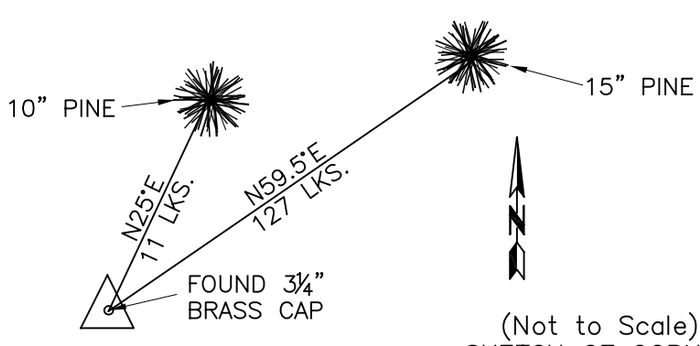

(Not to Scale)
SKETCH OF CORNER

CERTIFICATION

I, Steve Cummings
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Kurt A. Luebke
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 10-27-2009 Reg. No. 13237 S

Employer: DJ&A P. C.

Sec. 16



• - corner this sheet

Cross Index No. L-9 T. 5 N. R. 13 W. PMM

F:\5688 - GCDB\5688 - GCDB\dwg\CORNER RECORDATION.dwg