- 1. Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position.4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Sections 7 & 18 T. 5 S. R. 51 E. P.M.M. Powder River County

ORIGINAL RECORD: (1885 G.L.O.) Survey by George Scheetz.

SUBSEQUENT RECORD: (1939 G.L.O.) The 1/4 sec. cor.: a sandstone, 16x12x3 ins., marked and witnessed as described in the official record,

In place of the stone, set an iron post, 3 ft. long, 1 ins. diam., 28 ins. in the ground, for 1/4 cor. with the stone, set flush with the surface, on the N. side of the post, with brass cap marked as shown and raise a mound of stone, 2 ft.

base, 1 1/2 ft. high, N. of cor.

SUBSEQUENT RECORD: None found

EVIDENCE FOUND: Found 2 1/2" Brass cap, 0.15' below ground surface, nothing around, piled rocks around. Corner falls in open native

field.

PERPETUATION: Established a latitude and longitude for search purposes.

Date of Survey: July, 2008.




VIEW LOOKING EAST


Latitude = 45°24'22.85115"N Longitude = 105°28'26.36027"W NOTE: These coordinates are to be used as a search tool only.



NAD 83 coordinates for this corner:

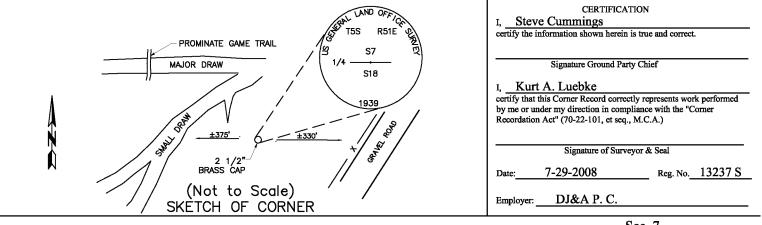

Office of Clerk and Recorder, County of Powder River . This "corner record" was filed for record on was noted on the cross index plat and is assigned page No. , in book No.



County Official