## INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
  Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner Sections 15, 16, 21 & 22 T. 6 N. R. 9 W. P.M.M. Powell & Deer Lodge County

ORIGINAL RECORD: (1869 G.L.O.)

Set cor. to secs. 15, 16, 21 & 22, a red sandstone 15x10x8 ins. with pits marked stone as per instructions.

SUBSEQUENT RECORD: (1984 R.G. Masters - Corner Recordation Form No. 116535)

Found red stone loosely set in cntr of mound of stones. Apparent faint 3 marks ea on south and east sides of stone.

Firmed set position of stone in mound and added more stones to mound.

EVIDENCE FOUND: Found 3½" Brass Cap, marked as shown below, 0.45' above ground, from which:

A fence corner post, bears east, 0.5 ft. dist.

Found loose red sandstone, 15x10x8 ins. alongside.

PERPETUATION: Left monument as found.


Located on steep northwest facing slope above ravine, approx. 0.3 mile north of two track road.


Date of Survey: September, 2009.



NAD 83 coordinates for this corner:

Latitude =  $46^{\circ}15'59.03115"N$  Longitude =  $112^{\circ}43'27.48092"W$ NOTE: These coordinates are to be used as a search tool only.

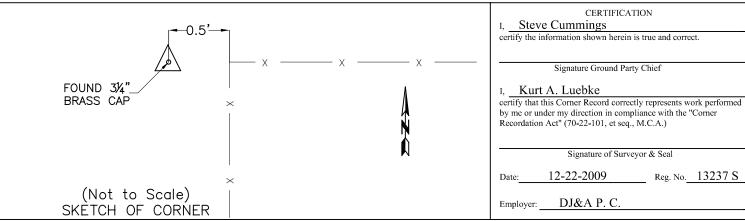



:\5688 - GCDB\dwg\CORNER RECORDATION.dwg