CERTIFIED CORNER RECORDATION


Corner County SECTION 19 20E **FERGUS**

ORIGINAL RECORD: (Robinson, 1882) Set limestone 12 x 8 x 6 in. 8 in. in the ground for cor. to Secs. 19, 24, 25 & 30. Marked 4 notches on N. and 2 on S. edges and raised a mound of stone alongside.

SUBSEQUENT RECORD: None

EVIDENCE FOUND: No original evidence found. Proportion position falls in county road construction area.

PERPETUATION: At the single proportion position set 5/8" rebar with 2" aluminum cap as shown below. Set references as shown below.

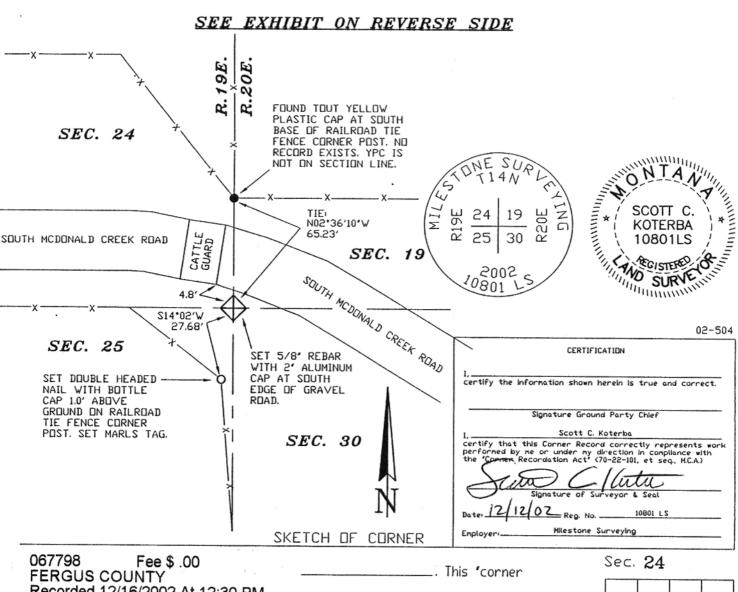

Recorded 12/16/2002 At 12:30 PM Kathy Fleharty. Clerk and Recorder assigned page No. 158 By Kum Marseau Deputy County Official Cross Index No. 14N **20E** · corner this sheet

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

FOUND 5/8' REBAR WITH 2' ALUMINUM CAP PER CORNER RECORDATION & C/S 300. R. 19E. R. 20E. SEC. 12 SEC. 7 N00*01'05*W 2724.17' GLD=2640' SEC.18 SET 5/8' REBAR WITH 2' ALUMINUM CAP AT FENCE CORNER (S X W) SEC.13 SINGLE PROPORTION POSITION, NOTHING FOUND OR SET THIS SURVEY. GLD=5280 5464.92 N00*04'48*E 1366.23 N. 1/16 CORNER. SET 5/8' REBAR WITH 2' ALUMINUM CAP. 366.23 SEC. 24 SET 5/8' REBAR WITH 2' ALUMINUM CAP AT FENCE CORNER (N-S X W) SEC.19 _ 2725,69' GLD=2640' SET 5/8' REBAR WITH 2' ALUMINUM CAP AT SINGLE PROPORTION POSITION. GLD=5280′ 5451,38 N00*02'41*V SEC. 30 FOUND ORIGINAL STONE. REPLACED WITH 5/8' REBAR & 2' ALUMINUM CAP. 20004 4000' 1000' SEC. 25 SCALE: 1' = 2000' SURVEYED: NOVEMBER, 2002 NOTHING FOUND OR SET THIS SURVEY. BASIS OF BEARINGS: CPS OBSERVATION PER C/S 633 8000,45 GLD=7920 N00*05'05'E SEC. 31 SEC. 36 R. 19E. 20E. FOUND ORIGINAL STONE. SCRIBED 'X' IN TOP-CENTER & SET REFERENCE MONUMENT. T. 14N. T. 13N. SEC. 6 . SEC. DRAWN: J. MILBURN SCALE: <u>1' = 2000'</u> CHECKED: S. KOTERBA CLIENT: DAVIDSON DATE: __DEC. 3, 2002 PROJ. NO: 02-504 SCOTT C. KOTERBA, PIS 324 DARBY AVE., LEWISTOWN, MT 59457 PHONE/FAX (408) 538-9223 REVISION: DEC. 11, 2002 FILE: 02-504-1