

CERTIFIED CORNER RECORDATION

Corner W1/4 OF SEC. 9 T. 17N R. 27W P.M.M. MINERAL County


ORIGINAL RECORD: 1894 GLO NOTES: Set a post 3 ft. long 3 ins. square 24 ins. in the ground for 1/4 sec. cor. marked 1/4S. on W. face, from which a pine 9 ins. diam. bears S.45°E. 69 lks. dist. marked 1/4S.B.T. a pine 30 ins. diam. bears West 100 lks. dist. marked 1/4S.B.T.

SUBSEQUENT RECORD: Certificate of Survey no. 288 by Warren {2734S} shows the quarter section corner 8 and 9 but does not say what type of monument.

EVIDENCE FOUND: FOUND 2.5" B.C. ON 2" GALVANIZED PIPE w/ NO MARKINGS.

RE-ESTABLISHMENT:

PERPETUATION: The face of Mile Post 38 to the quarter corner bears N5°W a distance of 307.75', and the interstate edge of pavement bears West, a distance of 27.85'.

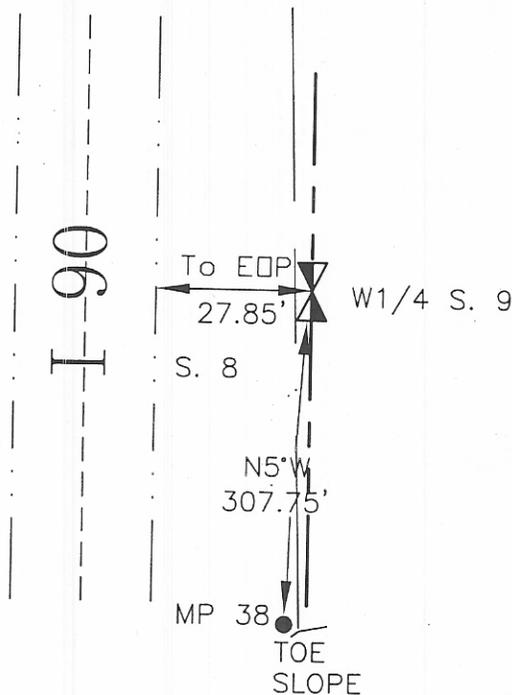

No Bearing
Trees
Observed



SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct


Signature Ground Party Chief

I, G. Stewart Nash
certify that this Corner Record correctly represents the corner
performed by me or under my direction in compliance with
the "Corner Recordation Act" (70-22-101, et seq. 1957.)

G. Stewart Nash
Signature of Surveyor & Seal

Date: 9-24-02 Reg. No. 52109

Employer: HARP Engineering

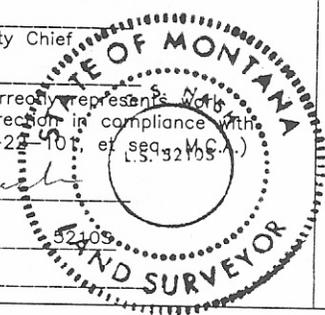

Office of Clerk and Recorder, County of MINERAL. This "corner record" was filed for record on September 30, 02 @ 10:30am

was noted on the cross-index plat and is assigned page No. _____, in book No. 092540

Katherine Jasper Dy K. McLeer
County Official

INDEXED

Cross Index No. G9 T. 17N R. 27W PMM

