

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

CORNER: $\frac{1}{4} \frac{2}{11}$ T.18N., R.27W., PRINCIPAL MERID., MT., MINERAL CO., MONTANA

G.L.O. NOTES: Rodney W. Page and Arthur Page 1893
Set a granite stone 18x10x6 ins., 12 ins. in the ground,
for 1/4 sec. cor. marked 1/4 on N. face; from which

A pine, 24 ins. diam., bears N.40°W. 76 lks. (50.2') dist.
marked 1/4 S BT.

A pine, 26 ins. diam., bears S.40°W. 31 lks. (20.5') dist.
marked 1/4 S BT.

WE FIND:

No evidence, destroyed by railroad construction.

TO PERPETUATE THE CORNER WE:


Set a 2½" x 30" alum. mon., buried 26" in the ground.
Drive a 6 ft. steel post with LAND SURVEY MONUMENT & ~~PROPERTY BOUNDARY~~
decals alongside of mon.

We establish new BT as follows:

20" Ponderosa pine bears S.19°E., 112.3', marked "1/4 S11 BT."

Telegraph pole bears N.86½°W., 44.3'.


Blazes and head-high band painted red on each BT. LAND SURVEY MONUMENT
& BEARING TREE signs are nailed to each tree.




NOTES:

Equipment used: Suunto compass, 19° E. declination; 100' cloth tape
Project No. 93-3722, Donlan Two A

Note: See Certificate of Survey

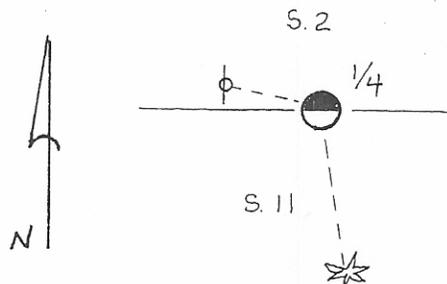

NOT TO SCALE SKETCH OF CORNER

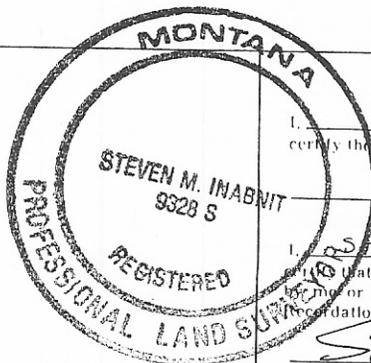

CERTIFICATION

I, STEVEN M. INABNIT
certify the information shown herein is true and correct.

Signature Ground Party Chief

STEVE INABNIT

I certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.C.A.)


Steve M. Inabnit
Signature of Surveyor & Seal

Date: 2/15/95 Reg. No. 9328LS

Employer: ELI & ASSOC.

Office of Clerk and Recorder, County of Mineral. This "corner
record" was filed for record on August 28, 1995 at 11:10 A.M.
was noted on the cross-index plat and is assigned page No. _____, in
book No. _____

Shirley Mancini by Anita E White
County Official



Cross Index No. E 19 T. 18N. R. 27W. PMM

• corner this sheet