

INSTRUCTIONS

- 1 Original and/or subsequent record used to evaluate the corner position.
- 2 Description of evidence found to note discrepancies in the record, state method of establishing location of bliterated corners.
- 3 Description of monument and accessories set to perpetuate the corner position.
- 4 Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc
- 5 Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6 Fill in Cross Index & Section Diagram at bottom of sheet.

61- 404845

CERTIFIED CORNER RECORDATION



Corner: 1/4 Section Corner 12 & 13 T. 20N R. 20W P.M.M. Lake County

ORIGINAL RECORD: (1905 G.L.O.) Set a slate stone, 14x8x7 ins., 9 ins. in the ground marked 1/4 on N. face; dig pits 18x18x12 ins., E. and W. of stone, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of corner.

SUBSEQUENT RECORD: See corner recordation #231485, set a 1 1/2" Copperweld monument; at a single proportion position.


EVIDENCE FOUND: Found a 1 1/2" Copperweld monument under the road surface of Innovation Drive.

PERPETUATION: Set a 3 1/4" MDT aluminum cap on a 30" aluminum pipe in the position of the Copperweld monument, with Copperweld buried inside. The cap is marked as shown in the sketch. From which;
A fence corner post bears S53°E, 57.8' distant; with a MARLS tag.

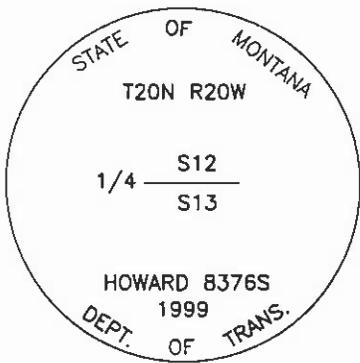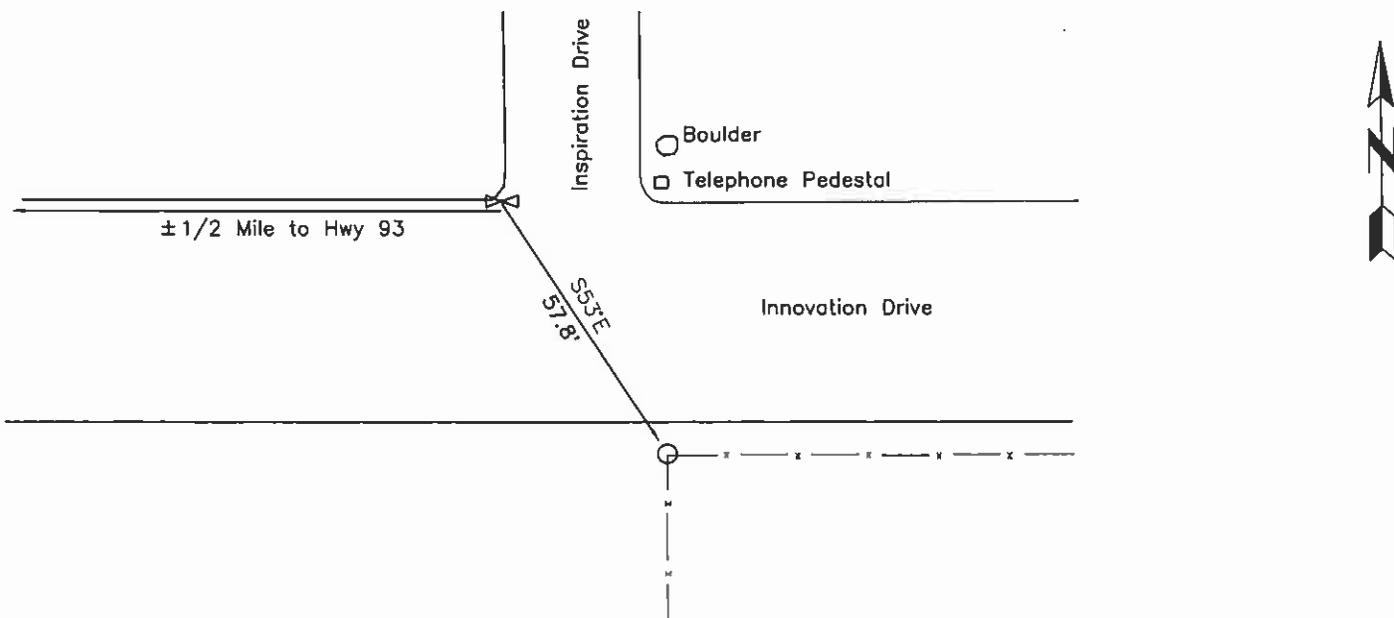

SKETCH OF CORNER

CERTIFICATION
 I, Joseph Bauch
 certify the information shown herein is true and correct
Joseph E. Bauch
 Signature Ground Party Chief
 I, Glenn R. Howard
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)
Glenn R. Howard
 Signature of Surveyor Seal
 Date: 12-16-99 Reg. No. 8376 S
 Employer: DJ&A, P.C.



Office of Clerk and Recorder, County of Lake. This "corner


record" was filed for record on DEC 17 1999 at 9:59 AM

was noted on the cross index plat and is assigned page No. 404845, in

Book No. 0-2294 RUTH E. HODGES by Jedymun's
 County Official [Signature]

Cross Index No. J-23 T. 20N R. 20W PMM

Sec. 13



• - corner this sheet

NC