## INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
   Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- S. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

  6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

¼ Corner Sections 35 & 36 T. 25 N. R. 18 W. P.M.M. <u>Lake County</u>

ORIGINAL RECORD: (1935 G.L.O.) Not recovered.

**EVIDENCE FOUND:** Found  $2\frac{1}{2}$ " brass cap, 1.5' above ground.

Monument lies in ditch at toe of cut slope next to gravel road.

Found 14" dead tree with BT tag and blaze bears N3°W, a distance of 41.6 feet.


PERPETUATION: A 6" pine bears N7°W, a distance of 12.2 ft., affixed BT tag.

Date of Survey: October, 2010.



NAD 83 coordinates for this corner:


Latitude =  $47^{\circ}53'06.01"N$  Longitude =  $113^{\circ}50'06.41"W$ NOTE: These coordinates are to be used as a search tool only.

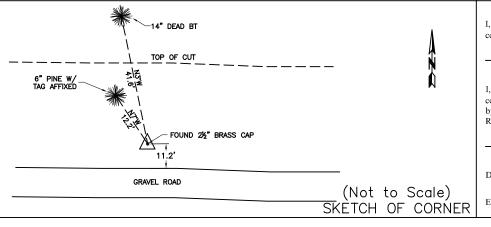

CERTIFICATION I, Steve Cummings certify the information shown herein is true and correct. Signature Ground Party Chief Kurt A. Luebke certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal Reg. No. 13237 S 11-22-2010

DJ&A P. C. Employer:



• - corner this sheet