

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

442338

CERTIFIED CORNER RECORDATION

Corner N 1/4 Sec. 17 T. 25N R. 20W P.M.M. Lake County

Record:


Set a slate stone 24x12x3 ins. 18 ins. in ground from which
 A pine 18 ins. diam bears N 49° E 401ks (26.4ft) dist.
 A pine 12 ins. diam. bears S 03° E 651ks (42.9ft) dist.

Found:

A stone with 1/4 on N. face 12x3 ins. 9 ins out of ground.
 No accessories found.

Accessories Created:

A Doug Fir 12 ins. diam. bears S 46° E 26.5 Ft. dist.
 A Larch 16 ins. diam. bears N 90° W 57.0 Ft. dist.
 Both B.T.s marked with snow blaze, foot blaze scribed "RM", both painted orange, and with MARLS B.T. tags.

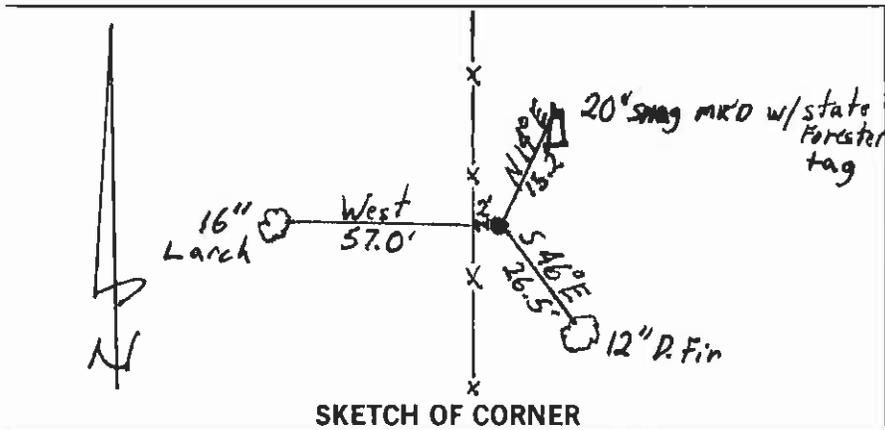

SKETCH OF CORNER

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature of Ground Party Chief
RICHARD BOACHER

I, _____
 certify that the above is a true and correct representation of the work performed by me or under my direct supervision in compliance with the "Corner Recordation Act" (20-23 MCA et seq., M.C.A.)

Signature of Surveyor & Seal
7318-S


Date: NOV 10 2003 Rec. No. 7318-S

Employer: _____

Office of Clerk and Recorder, County of Lake. This "corner record" was filed for record on 442338 NOV 10 2003 4:33 pm

was noted on the cross-index plat and is assigned page No. _____, in book No. C-2522 RUTH E. HODGES by: Jenny Muniz County Official dep

Cross Index No. J7 T. 25N R. 20W P.M.M.

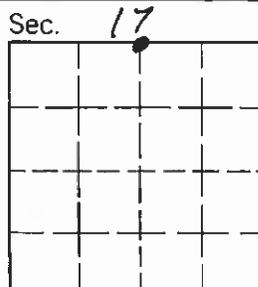

• - corner this sheet