1. ORIGINAL AND/OP SUBSEQUENT RECORD USED TO EVALUATE THE CORNER OSITION.

2. DESCRIPTION C IDENCE FOUND, NOTE DISCREPANCIES IN THE RECORD TE METHOD OF ESTABLISHING LOST OR OBLIT. (FED CORNERS.)

3. DESCRIPTION OF MONUMENT AND ACCESSORIES SET TO PERPETUATE THE CORNER POSITION.

4. SKETCH OF CORNER, SHOW ALL PERTINENT DATA WHICH CAN BEST BE SHOWN IN A SKETCH EXAMPLE, CORNER MARKINGS, TOPOGRAPHY TIES, POSITION OF ACCESSORIES, ETC.

5. CERTIFICATION MUST BE SIGNED AND SEALED BY LAND SURVEYOR REGISTERED IN THE STATE OF MONTANA.

6. FILL IN CROSS INDEX AND SECTION DIAGRAM AT BOTTOM OF SHEET.

CERTIFIED CORNER RECORDATION

CORNER North Quarter SEC. 12, T. 28 N., R. 39 E., P.M.M., Valley COUNTY, MT

ORIGINAL RECORD : Surveyed by James M. Page & Rodney W. Page in Oct., 1891

Do not have notes.

SUBSEQUENT RECORD: Dependent Resurvey by Wm. H. Teller & Lyle F. Jones in 1946.

Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist., falls in ravine. The original corner stone was found in the bottom of the ravine. Set an iron post, 3 ft. long, 1 in. diam., 34 ins. in the ground, with brass cap mkd.


Bury the old stone at the base of the iron post. From the corner, a fence corner, the SW. corner of the Glasgow Army Air Base, bears S.76045' E., 21 lks. dist, fences bear irregularly E. and N. Raise a mound of stone, 3 ft. base, 1% ft. high, N. of corner.


EVIDENCE FOUND:

Found GLO brass cap 1" above ground with a M.D.T. 5% ft galv. steel witness post 0.5 ft. north of cap.

SET:

Monument in good condition. Nothing new set.

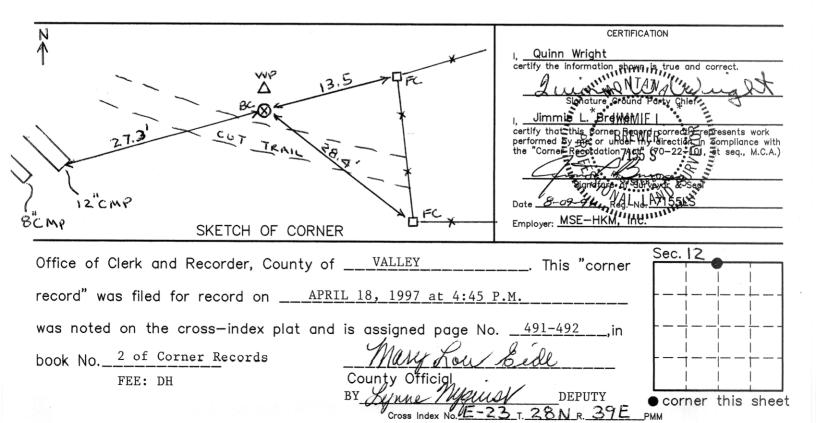

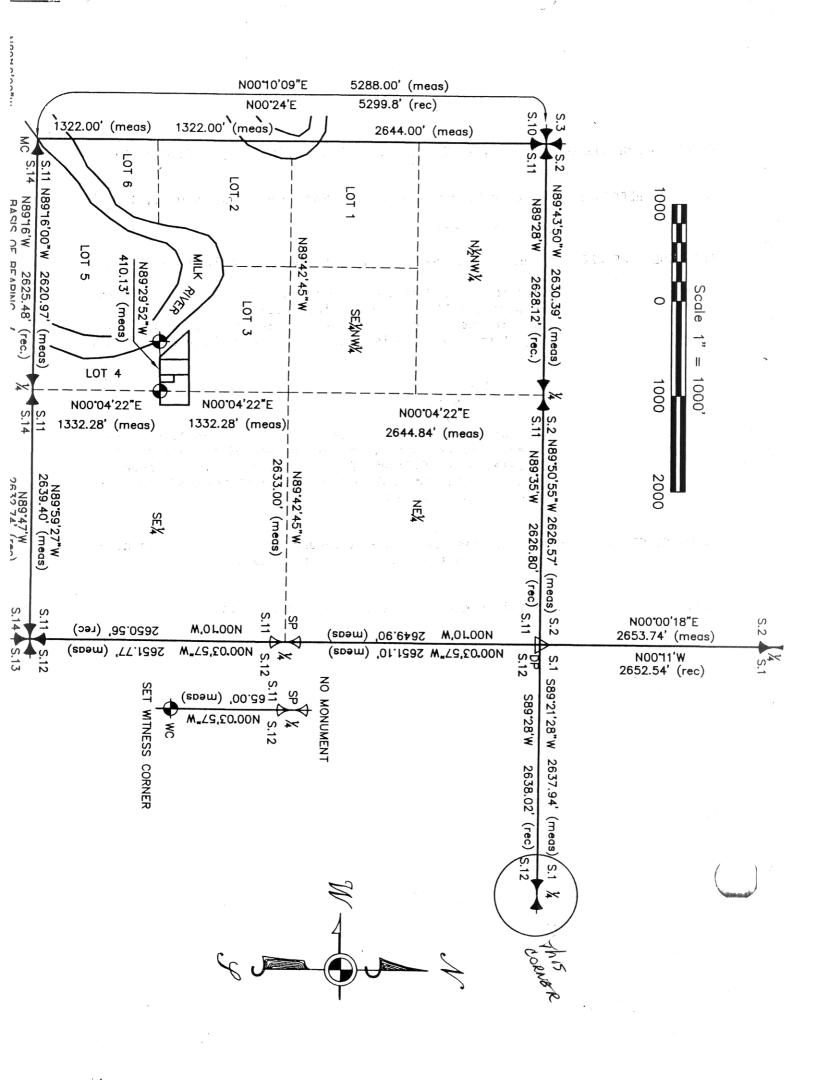

Exercise MO last made in mo