

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Sections 2, 3, 10 & 11 T. 32N R. 15E P.M.M. Hill County

ORIGINAL RECORD: (1894 G.L.O.) Set a sandstone 16x10x8 ins., 11 ins. in the ground for cor. to secs. 2, 3, 10 & 11, marked with 5 notches on S. and 2 notches on E. edges, dug pits 18x18x12 ins. in each sec. 5 1/2 ft. dist. and raised a mound of earth 2 ft. high 4 1/2 ft. base alongside.

SUBSEQUENT RECORD: (1980 C.R. 454242 by James Spring) Found stone with no marks, found 1/2" rebar alongside. Set 2 1/2" iron pipe with 3" brass cap, in place of rebar.

SUBSEQUENT RECORD: (1984 C.R. 473093 by Donald V. King Jr.) Found stone as described in original notes set alongside 3" Brass Cap. Said cap placed by C.S.S.&A. of Billings. The stone was removed and replaced by cap with stone being placed alongside.


EVIDENCE FOUND: Found a 3 1/4" brass cap, marked as shown below in mound of stone. The monument falls approximately 56' west of the airport road. There is a power pole and telephone pedestal which bear N33°W, 30.5' distant.

PERPETUATION: Left the brass cap as found. Placed a BT tag on a fence post which bears N30°W, 1.5' distant.

Date of Survey: February, 2007.

Compass Declination Used: 16°E

NAD 83 coordinates for this corner:
 Latitude = 48°33'13.528"N Longitude = 109°45'26.706"W
 NOTE: These coordinates are to be used as a search tool only.

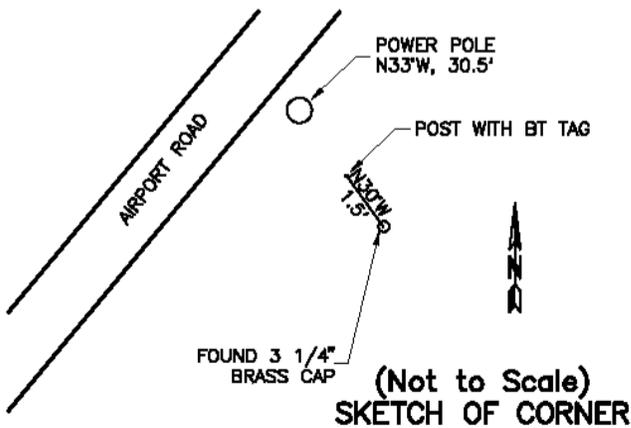

CERTIFICATION

I, Steve Cummings
 certify the information shown herein is true and correct.

 Signature Ground Party Chief

I, Kurt A. Luebke
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

 Signature of Surveyor & Seal

Date: _____ Reg. No. 13237 S

Employer: DJ&A P. C.

Office of Clerk and Recorder, County of Hill. This "corner record" was filed for record on _____ was noted on the cross index plat and is assigned page No. _____, in book No. _____

 County Official

Sec. 10

			●

● - corner this sheet

Cross Index No. E-17 T. 32N R. 15E PMM