

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION


Corner SE Sec. Cor. Section 6 T. 28N R. 40E P.M.M. Valley County

GLO RECORD Book 2536

80.00 Set a granite Stone 12x7x6 ins 8 ins in the ground for the cor. to secs. 5, 6, 7 & 8 marked with 5 notches on S and 5 Notches on E edges, sug pits 18x18x12 ins. in each sec. 5 1/2 ft distance and raised a mound of earth 2 ft high 4 1/2 ft base alongside.

EVIDENCE FOUND:

A WELL ROTTED WOOD HUB AND A 1" diam pipe driven into the ground with 6" bury, at the corner point, as indicated by the faint lines and grades of the old county road, and an ancient fence line to the North. The top of the pipe had a brass 50 cal. machine gun expended cartridge driven into it. The dented primer, and the letters SL 42 show on the head of the cartridge case. The corner appears to have been set by the Corps of Engineers when fencing the Glasgow Army Air Base in 1942. Survey notes by the Corps are no longer available according to a reply to me made by the Seattle district, Corps of Army Engineers. Set a 5 1/2 ft steel post along side for witness to the corner.

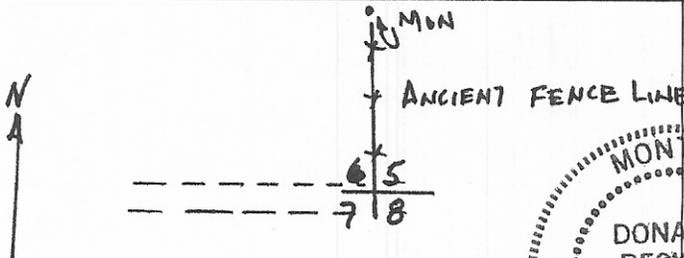

CERTIFICATION D. C. Beckman


I, certify the information shown herein is true and correct.

D. C. Beckman Signature Ground Party Chief

I, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

D. C. Beckman Signature of Surveyor & Seal

82 Reg. No. 889ES

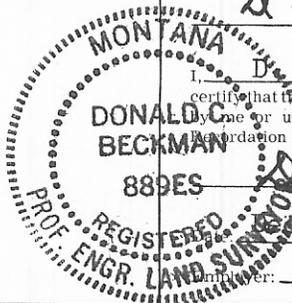

SKETCH OF CORNER

STATE OF MONTANA

Office of Clerk and Recorder, County of VALLEY. This "corner

record" was filed for record on the DEC 20 1982 day of 19, at 10:30 A.M.

was noted on the cross-index plat and is assigned page No. 550, in


book No. 1 of CORNER RECORDATIONS Mary Lou Cole County Official Deputy

FEE: DH

By Mary Lou Cole Deputy

Cross Index No. E, 5 T. 28N R. 40E P.M.M.

Sec. 6



• - corner this sheet